



### Type 2 Water Maker

Ion Exchange with over five decades of experience in innovative total water management solutions, presents INDION Lab-Q Smart (Type 2) Water Maker. It produces pure water which is essential for creating chemical reagents, microbiological buffers and media that are consistently pure. It is an excellent source of water for glassware washing and as feed water for laboratory equipment such as autoclaves, laboratory dishwashers and water baths. It is also a recommended source of pretreated water for use in Type 1 ultra pure systems. It produces water with very low Total Organic Carbon (TOC) content and conforms to ISO 3696 and corresponding ASTM standards. Potable tap water can be directly connected to INDION Lab-Q Smart to produce Type 2 pure water. It is easy to install and has several built-in safety features for reliable and consistent Type 2 water supply. For feed water with higher level of TDS i.e.> 500 ppm a customised pretreatment module can be designed prior to INDION Lab-Q Smart.



Capacity: 10 LPH

#### **Features**

- Online resistivity meter displays product water quality for continuous monitoring
- Automatic Flush Device (AFD) ensures periodic cleaning of the system
- Dry run protection ensures protection of the pump when inlet water is unavailable
- Easy accessibility of components all cartridges and filters are easily accessible and no special tool is required to replace them
- Simple installation simple to install, operate and maintain with a clear indication of water purity
- Instant water dispensing with single touch user interface
- Electrolytic auto sanitiser ensures periodic sanitisation of upstream purifying filters
- Optional filtration filter can be attached at the point of dispensing spout to ensure compliance to microbial reduction values



Capacity: 50 LPH


# Advantages

• Tap water as source • Compact • Low operating cost • Minimum maintenance

## **Applications**


- Flame spectrometry Electrochemistry Sample dilution Radioimmunoassay Electrophoresis
- General chemistry Feed for Type I water maker Feed for clinical analysers Preparation of media & buffer Autoclave & water bath

## Schematic Flow Chart for INDION Lab-Q Smart - 10 LPH

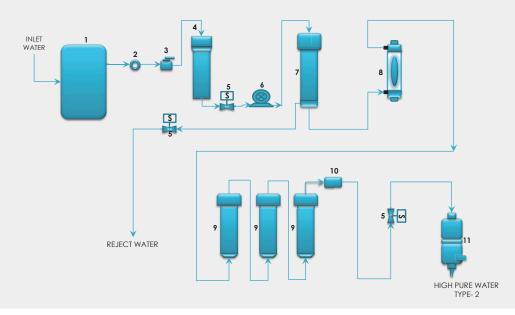

- 1 Lab-Q Pre-treat
- 2 Sanitizing Cell
- 3 Low Pressure Switch
- 4 Lab-Q Clear Filter
- 5 Solenoid Valve (TLC,AFT,DISP)
- 6 Booster Pump
- 7 Lab-Q RO Membrane
- 8 Lab-Q UV-18
- 9 Lab-Q Super Cartridge
- 10 Resistivity Sensor
- 11 POU Dispensing UF Filter

# Schematic Flow Chart for INDION Lab-Q Smart Type-2 - 50 LPH

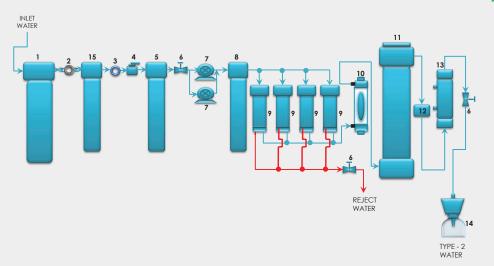

- 1 20" Big Blue Sediment Filter
- 2 Water Meter
- 3 Sanitizing Cell
- 4 Low Pressure Switch
- 5 Lab-Q 20" Sediment Filter
- 6 Solenoid Valve
- 7 Booster Pump-48VDC
- 8 Lab-Q 20" Activated Carbon Filter
- 9 Lab-Q RO -100 GPD
- 10 UV-18 50L
- 11 Lab-Q Super-50L Cartridge (Pack of 4)
- 12 Resistivity Sensor
- 13 UF Filter-50L
- 14 Capsule Filter 0.22 $\mu$
- 15 Lab-Q 20" Super Sorb Filter

### **Feed Water Specifications**

Configuration	10 LPH	50 LPH	
TDS	500 ppm max.		
Fe, Mn	Nil		
Free chlorine	Nil		
Silica	< 20 ppm		
Inlet pressure	0.5 - 2 .0 Kg/cm2	Min 0.5 kg/cm2 Max 2.0 kg/cm2	

## **Product Specifications**

Configuration	10 LPH	50 LPH
Dimensions W x D x H (in mm)	450 X 250 X 500	390 X 740 X 720
Weight	13 kg	40 kg
Power Requirement	230 VAC ± 10%	
Power Consumption	40 Watts	250 Watts

### **Performance Parameters**

Flow Rate	10 LPH	50 LPH
Resistivity (Grade II)	> 10 MΩ.cm	
Conductivity (Grade II)	< 0.1 μS/cm	
Endotoxin level*	< 0.25 EU/ml	
Particle > 0.22 $\mu$ m*	< 1 per ml	
Bacteria*	< 0.1 cfu/ml	< 10 cfu/100ml
Total organic carbon (TOC)*	< 30 ppb	

<sup>\*</sup>Performance parameters achieved when water dispensed through final point of use 0.22  $\mu$ 

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice. Please contact our regional I branch offices for current product specifications.



is the registered trademark of Ion Exchange (India) Ltd.



#### ION EXCHANGE (INDIA) LTD.

#### Corporate Office

Ion House, Dr. E. Moses Road, Mahalaxmi, Mumbai - 400011.

#### Commercial Water Solutions (CWS) Division

Ion House, Plot No.2, Sector-18, Vashi, Navi Mumbai - 400 705, India. Tel: 8879142511, 9967335934 | E-mail: labq@ionexchange.co.in

**Manufacturing Units** 

India - Ankleshwar | Hosur | Patancheru | Rabale | Verna | Wada

Overseas - Hamriyah | Indonesia | Bangladesh

All India Service and Dealer Network



<sup>\*</sup>TOC values achieved with feed water of less than 2000 ppb