



**INSTANT PURE & ULTRAPURE WATER  
FOR MULTIPLE LABORATORY APPLICATION**

## **Importance of Water**

Water due to its properties is the most commonly used reagent in the laboratories. The quality of water used in the lab not only effects the performance of test equipment's but also the test results, hence water is quality is of prime importance in a laboratory environment.

## **Contaminates in Water**

This can be classified as Physical, Biological and Chemical which is further divided into Organic & Inorganic. Every contaminant will have a different impact on the lab experiments which is why water for the laboratory use has to be free from any impurities.

## **Purification Technologies**

There is no single purification technology that will remove all the impurities. Effective purification of water involves integration of various purification technologies that will eliminate specific contaminants.

---

## Lab Water Application

Water used in the lab is defined as Type 3 Type 2 or Type 1 base on the critically of the experiment and sensitivity of the application.

**Type 3** often used for routine application such as glassware rinsing, heating baths and filling autoclaves, or to feed Type 1 lab water systems

**Type 2** or the reagent grade water is used for general lab application such as as buffers, pH solutions and microbiological culture media preparation; as feed to Type 1 water systems, clinical analyzers, cell culture incubators and weathering test chambers; and for preparation of reagents for chemical analysis or synthesis

**Type 1** is required for critical applications such as HPLC mobile phase, blanks & sample dilution in GC, HPLC, AA, LCMS, ICP-MS and other advanced Molecular techniques.

---

## Integrated System

**Lab Q Spectra** is designed to meet these critical aspects of an advance lab while delivering pure and ultra pure water for routine and critical laboratory application.



Lab Q Spectra integrates various technologies like Depth filtration, Activated carbon, CO<sub>2</sub> removal, Reverses osmosis, De-ionization, Ultraviolet, Ultra filtration & Absolute filtration to remove various contaminants like particulate, organic, inorganic , microbial and gases

---

## Advanced User Interface

**Lab Q Spectra** has the advanced **interactive touch screen** based user interface that ensure easy navigation, data viewing, control and action

**Smart control & sensor** are in place for continues monitoring of water quality at different stages, performance of purification packs & storing critical system function thus ensuring uninterrupted and consistent laboratory water.



In built memory stores & retrieves error codes, consumables efficiency and other important system functions for **auto diagnosis** & preventative action.





## **Innovative Dispensing**


Lab Q Spectra has multiple dispensing options like continues, volumetric, remote and hands free operation for more productive lab environment

## **Standard Pre-treatment**

Lab Q Spectra come with the a standard pre treatment that consists of depth filter, CO2 removal filter, activated carbon, booster pump & auto cutoff sensor to ensure protection from varying feed water quality and pressure

## **Quality & Compliance**

Lab Q Spectra comply to good laboratory practices. All the units comes with certificate of compliance, certificate of quality & conformity. These units can be validated on site which includes IQ OQ & guidelines for PQ

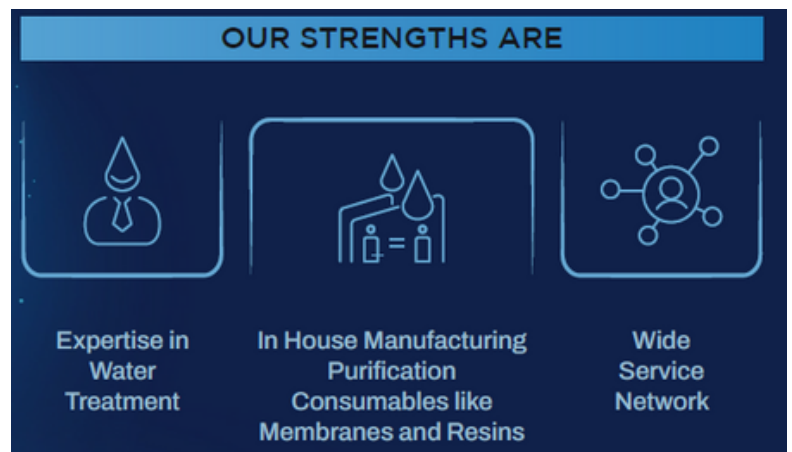

## Auto Sanitization



**Lab Q Spectra** has the patented ESS, Insitu & Automatic Sanitization module as a standard hence **eliminates** the need of **chemical sanitization**

Type 2 water storage has two options 30L & 60L. The reservoir is made of food grade PE with conical bottom, air tight wide lid, with multilayer air vent, level sensor & **Automatic Sanitization Module**




**NO HARSH  
CHEMICAL**

*Just Say Yes to*

**LAB-Q**  **SPECTRA**

## Lab Q Spectra Flow Diagram

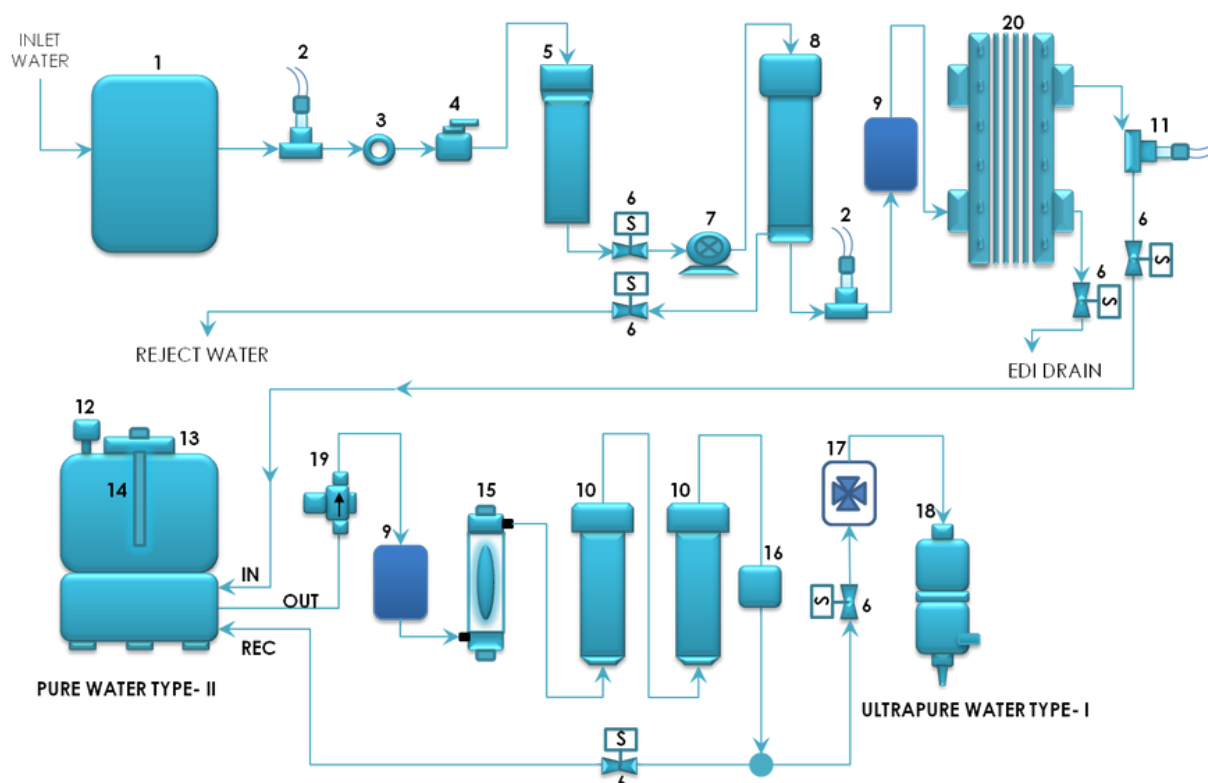


## ASTM Type 2 & Type 1 EDI based Lab Water

- 1 -LAB-Q PRE-TREAT
- 2 -TDS SENSOR ( FEED & RO)
- 3 -ACTIVE SILVER
- 4 -PRESSURE SWITCH
- 5 -LAB-Q CLEAR
- 6 -SOLENOID VALVE
- 7 -BOOSTER PUMP
- 8 -RO MEMBRANE
- 9 -E-SAN CELL
- 10-LAB-Q SUPER

- 11-TYPE-2 CONDUCTIVITY SENSOR
- 12-TANK AIR FILTER
- 13-STORAGE TANK 30L
- 14-TANK UV LAMP
- 15-UV-18 LAMP
- 16 - RESISTIVITY SENSOR
- 17 - FLOW SENSOR
- 18-POU DISP. UF FILTER
- 19-PRV
- 20- EDI MODULE



## Lab Q Spectra Flow Diagram

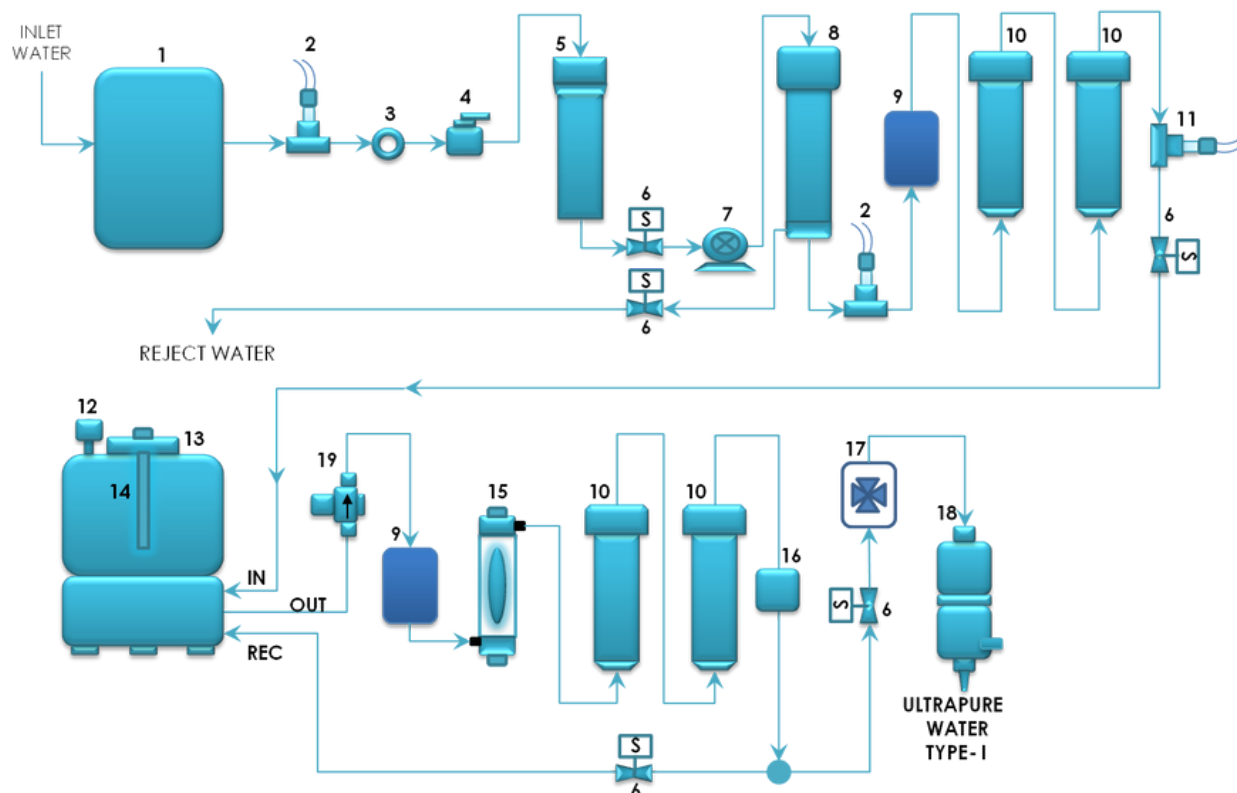

## ASTM Type 2 & Type 1 DI based Lab Water

1 -LAB-Q PRE-TREAT  
2 -TDS SENSOR ( FEED & RO)  
3 -ACTIVE SILVER  
4 -PRESSURE SWITCH  
5 -LAB-Q CLEAR  
6 -SOLENOID VALVE  
7 -BOOSTER PUMP  
8 -RO MEMBRANE  
9 -E-SAN CELL  
10-LAB-Q SUPER

11-TYPE-2 CONDUCTIVITY SENSOR  
12-TANK AIR FILTER  
13-STORAGE TANK 30L  
14-TANK UV LAMP  
15-UV-18 LAMP  
16 - RESISTIVITY SENSOR  
17 - FLOW SENSOR  
18-POU DISP. UF FILTER  
19-PRV

# Lab Q Spectra Specifications

Lab Q range of products comply with ASTM, ISO, NCCLS and US Pharmacopeia Water Quality Standards

With expertise in water treatment for more than 55 years we can give customized pre treatment based on feed water quality

FEED WATER SPECIFICATIONS	
TDS	500 ppm max.
Fe, Mn	NIL
Free Chlorine	NIL
Silica	< 20 ppm
Inlet Pressure	0.1-2.0 Kg/cm <sup>2</sup>
PRODUCT DIMENSIONS	
Unit Dimensions (WxHxD)mm	630x280x590
30/60 Ltr Storage Tank Dimensions	380x380x885
Weight	20 Kgs
Power Requirement	230V AC $\pm$ 10%
Power Consumption	80 Watts
Alkalinity / Hardness	200 ppm max

PERFORMANCE PARAMETERS		
	ASTM TYPE 2 WATER	ASTM TYPE 1 WATER
Flow Rate	10 LPH	1 - 1.5 l/min
Conductivity	< 0.1 $\mu$ S/cm	0.054 $\mu$ S/cm
Resistivity	10 M $\Omega$ .cm	18.2 M $\Omega$ .cm
Total Organic Level (TOC)	< 30 ppb	< 5 ppb*
Endotoxin Level	NA	< 0.25 Eu/ml
Particle > 0.22 $\mu$ m	NA	< 1 per ml
Bacteria	NA	< 0.1 cfu/ml
Dnase/Rnase	NA	Nil

APPLICATION GUIDE		
ASTM Type 2/3	ASTM TYPE 2 WATER	ASTM TYPE 1 WATER
Lab Ware Rinsing	Buffers & pH solutions	HPLC mobile phase preparation
Autoclave	Microbiological culture media preparation	Blanks and sample dilution in GC, HPLC, AA or ICP-MS
Water Bath	Dissolution & dilution media preparation	Buffer & culture media preparation of cell culture
Cooling /Heat Exchange	In place of USP grade purified water	Reagent preparation for molecular biology applications
Feed For Type 1 Unit	Feed for Type 1 unit	-
Alternate to Distilled Water	Alternate to double distilled water	-

\* TOC values achieved with feed water of less than 50 ppb.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice. Please contact our regional / branch offices for current product specifications.

**INDION** is the registered trademark of Ion Exchange (India) Ltd.

Ion House, Plot No.-2, Sector - 18,  
Vashi, Navi Mumbai,  
Maharashtra 400705

www.labwater.in  
swaminathan.iyer@ionexchange.co.in  
India : 9967335934